High Brightness Professional Monitor User Manual



Manual Version HBA1.0

Safety Instructions



- Please keep the display away from any heat sources. Place the display in a stable and well-ventilated place.
- Please handle with care as product contains glass.
- The holes or openings on the display are designed for ventilation. Do not cover or block the ventilation holes or openings with any objects.
- Remove protective covering from the screen before you use the display.
- Shut off the power supply before cleaning. Use a soft lint-free cloth instead of a tissue to wipe the screen.
- You may use a glass cleaner to clean the product as required. However, never spray the cleaner directly onto the display surface.
- Do not attempt to repair this product yourself! Improper disassembly of the product may invalidate the warranty and lead to possible danger
- If you have a problem that cannot be solved using the "Troubleshooting" guidelines, please contact your supplier.

Quick Start Guide

This section of the guide is to allow swift set up and use of the unit. Please refer to the main part of the User Guide for full information on use of the unit.

Please follow the steps detailed below:

- 1 Unpack unit and place in desired location.
- 2 Take the power lead from the accessories bag, connect power lead and plug into mains outlet. The unit will power ON automatically (if it doesn't please ensure the "AC Switch" is in the on position). After powering up the screen will start to play some pre-loaded sample content.
- 3 Collect the files you wish to display and make sure they are supported by the unit (see Section 2.1)
- 4 On a PC copy the files you want to play onto an empty USB drive. These should be in the root directory (without putting them into a folder). Remove USB from PC.
- 5 Insert USB drive into the one of the USB ports located on the rear of the unit (see Figure 1). The screen should indicate that it is copying the files onto the unit. Please note that all files currently stored in the unit will be deleted. Once completed, the screen will display a message to remove the USB drive.
- 6 Remove the USB drive and the unit will reboot and play the stored files in a loop.



Figure 1 Position of USB ports

Contents:

1.		Introdu	uction5		
	1.1	1	Box Contents5		
	1.2	2	Inputs Overview5		
	1.3	3	Remote Control		
	1.4	1	Replacing the Remote Control Battery7		
	1.5	5	Home Screen		
	1.6	5	System Menu Operation9		
		1.6.1	System Settings9		
		1.6.2	System Control15		
		1.6.3	Date & Time		
		1.6.4	Power On/Off20		
		1.6.5	Timer Strategy21		
		1.6.6	File Management24		
		1.6.7	Exit24		
	1.7	7	Display Settings25		
2.		System	0 Operation		
	2.2	1	Supported Media Files		
	2.2	2	Steps to Load Media Files29		
3.		Advan	ced Guide		
	3.2	1	Main Menu		
	3.2	2	Creating Playlists		
		3.2.1	Add Schedule31		
		3.2.2	Add Selected Items31		
		3.2.3	Saving		
	3.3	3	Editing Playlists		
		3.3.1	Deleting Items		
4.		F.A.Qs	and Troubleshooting Guide36		
	4.2	1	How do I play PowerPoint presentations on my display?		
		4.1.1	Option 1 (for plain slides with no animation):		

4.1.2	Options 2 (for presentations with animation):	
4.2	Video Format Conversion	37
4.2.1	Format Factory	37
4.2.2	HD Video Converter Deluxe	39
4.3	Connecting screen to PC	40
4.4 My media file does not fit properly on the screen		40
4.5	My media file will not display or is missing from the playlist	41
4.6	My media files will not update	41
4.7	My moving GIF files will not move	41

Table of Figures

Figure 1 Position of USB ports	2
Figure 2 Inputs Overview	5
Figure 3 Home Screen	8

1. Introduction

Congratulations on your purchase of our product. Please read carefully and follow all instructions in the manual before first use.

The product should not be exposed to liquids dripping or splashing and no objects filled with liquids, such as vases, should be placed on the product.

Attention:

- 1. Do not change any default setting when it is unnecessary.
- 2. Keep the product far away from water during installation and use.

1.1 Box Contents

- 1 x High Brightness Professional Monitor.
- 1 x Power Cable.
- 1 x CD (User Manual).
- 1 x Remote Control (with 2xAAA batteries).
- 1 x HDMI Cable

1.2Inputs Overview

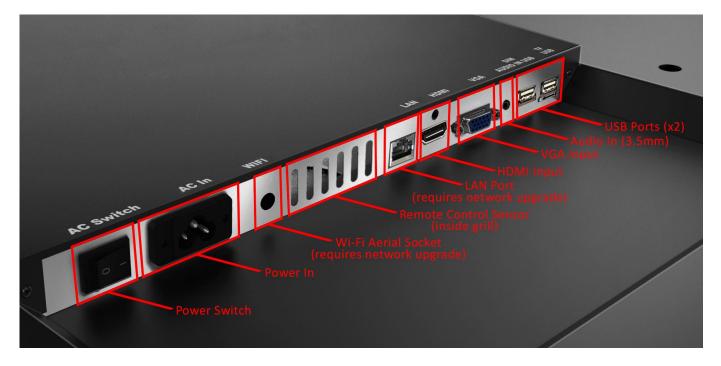


Figure 2 Inputs Overview

1.3 Remote Control



Button	Function
POWER/🖒	Power on or off
MENU	Display settings
SETUP	Menu settings
SOURCE/	Input source
	Up (navigation)
•	Left (navigation)
	Right (navigation)
▼	Down (navigation)
▶/	Play media
	Stop media
	Previous
	Next
Ŕ	Display settings
↓ +	Raise volume
Ц -	Lower volume

1.4 Replacing the Remote Control Battery

- 1. Slide the battery cover off, as shown below.
- 2. Remove the used batteries.
- 4. Insert the two new AAA batteries with their terminals corresponding to the indicators.
- 5. Put the cover back on.



1.5 Home Screen

Once your screen has powered up and begins to play content press the "STOP" button on the remote control to go back to the Home Screen (pictured below).



Figure 3 Home Screen

1.6 System Menu Operation

From the Home Screen you can bring up the Main Menu by pressing the "SETUP" button the remote control. The Main Menu includes following sub-menus: System Settings, System Control, Date & Time, Power On/Off, Timer Strategy, File Management and Exit.

Press $\uparrow \& \downarrow$ to select the right item, press "PLAY" to confirm selection. To get back to the side menu press the "LEFT" navigation button on the remote control.




1.6.1 System Settings

The sub-menus within this section are: Display Language, Screen Mode, Screen Resolution, On Screen Clock, USB, Scrolling Text, Sync Settings, Restore to Factory Settings and Auto Start. To exit a sub-menu please press the "LEFT" navigation button the remote control, you can now navigate though the Main Menus sub-menus.

System Setting	System Se	etting
System Control	Display Language	English 🕥
Network Setting	Switch Screen Mode	180° 📎
Date And Time	Switch Screen Dpi	1920*1080 📎
Ower On/Off	Real Time Clock	Close 义
Strategy Time	Play Log	$\bigcirc \circ)$
File Management	USB	
Exit	Next	Page

Display Language

The On Screen Display supports multiple languages, the default being English. As with all menu operation press "DOWN" to access the sub-menu then use the navigation buttons to select the right item, then "PLAY" to confirm selection.

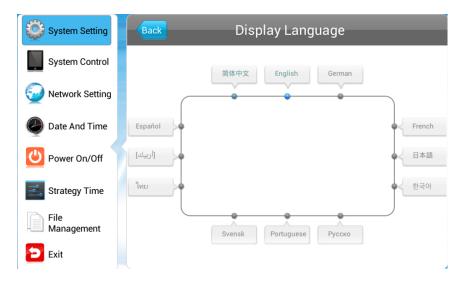

Switch Screen Mode


Here you can set the screens orientation so as the OSD and content display correctly. There are 4 options as pictured below:

- 0° (default landscape) Displays in landscape with the locker door on the left hand side.
- 90° Displays in portrait with the locker door on the top.
- 180° Displays in landscape with the locker door on the right hand side.
- 270° (default portrait) Displays in portrait with the locker door on the bottom.

System Setting	Back	Switch Screen Mode
System Control	0 °	
Wetwork Setting		
Date And Time	<u> </u>	
Power On/Off	<mark>0</mark> 180°	
Strategy Time		
File Management	⊙ 270°	
Exit		

Screen Resolution

This menu allows you to set the screen resolution; this should be set to 1920x1080.

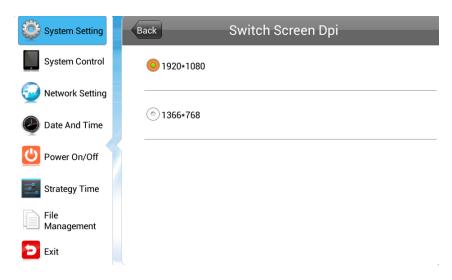

Real Time Clock

This option allows you to display a clock while content is playing. There are 5 options as pictured below:

- Close: The screen doesn't display time.
- Top Left: The time will be displayed on top left of the screen.
- Top Right: The time will be displayed on top right of the screen.
- Bottom Left: The time will be displayed on bottom left of the screen.
- Bottom Right: The time will be displayed on bottom right of the screen.

System Setting	Back Real	Time Clock
System Control	Close	
Network Setting	() UpLeft	
Date And Time		
Ower On/Off	UpRight	
Strategy Time	LeftDown	
File Management	RightDown	
🔁 Exit		

Play Log

This is a network function only and is disabled on this screen.

System Setting	System Se	etting
System Control	Display Language	English 📎
Wetwork Setting	Switch Screen Mode	180° 📎
Date And Time	Switch Screen Dpi	1920*1080 📎
Ower On/Off	Real Time Clock	Close 📎
Strategy Time	Play Log	00
File Management	USB	
Exit	Next	Page


USB

This allows you to enable or disable the USB port. If you want to be able to update the screen please ensure this is turned on (blue).

System Setting	System Se	tting
System Control	Display Language	English 📎
Wetwork Setting	Switch Screen Mode	180° 📀
Date And Time	Switch Screen Dpi	1920+1080 📎
Power On/Off	Real Time Clock	Close 📎
Strategy Time	Play Log	$\bigcirc \circ)$
File Management	USB	
Exit	Next P	'age

Scrolling Text

This allows you to enable or disable the scrolling text function. If you have included scrolling text in your playlist (using the scheduling software) and want it to display please ensure this is turned on (blue).

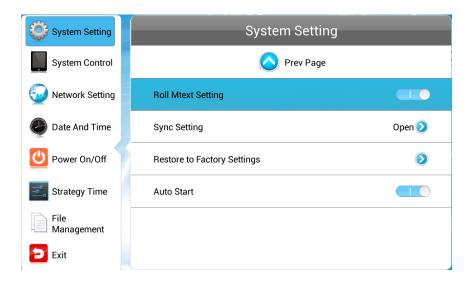

Sync Settings

This is a network function only and is disabled on this screen.

System Setting	Back Sync Setting
System Control	
Wetwork Setting	Sync Setting
Date And Time	Sync Setting: 💿 Host 💿 Slave
Power On/Off	Sync Methods: 2.4G Network
📑 Strategy Time	
File Management	
🔁 Exit	

Restore To Factory Settings

Highlight "Yes" and press "PLAY" to restore factory settings; this will restore all system settings back to default.

System Setting	System Setting		
System Control	🚫 Prev Page		
Wetwork Setting	Roll Mtext Setting		
Date And Time	Sync Setting	Open >	
Power On/Off	Restore to Factory Settings	۲	
Strategy Time	Are you sure you want to restore to factory	settings ?	
Management	Auto Start		
Exit			


Auto Start

This feature allows your screen to start playing the pre-loaded content as soon as it has finished booting up. If you want to enable this feature (recommended) please ensure this is turned on (blue).

System Setting	System Setting	
System Control	O Prev Page	
Q Network Setting	Roll Mtext Setting	
Date And Time	Sync Setting	Close 📎
Power On/Off	Restore to Factory Settings	٥
Strategy Time	Auto Start	
File Management		
Exit		

1.6.2 System Control

To exit a sub-menu please press the "LEFT" navigation button the remote control, you can now navigate though the Main Menus sub-menus. The sub-menus within this section are: Work Mode, Play Mode, Content Storage, Image Duration.

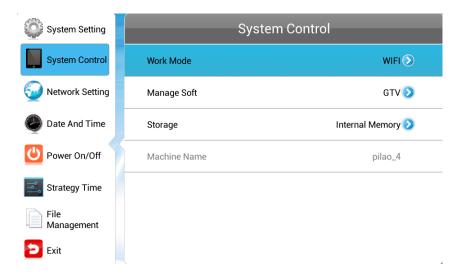


Work Mode

This feature allows you set the update method for your screen. It should be set to "STANDALONE"

System Setting	Back	Work Mode
System Control	• SINGLE	
🧿 Network Setting		
Date And Time	() LAN	
Power On/Off		(lio
📑 Strategy Time		`
File Management	(3G	att
Exit		

Play Mode

This feature is only available if the screen is set to "STANDALONE" mode and should be set to "Open".

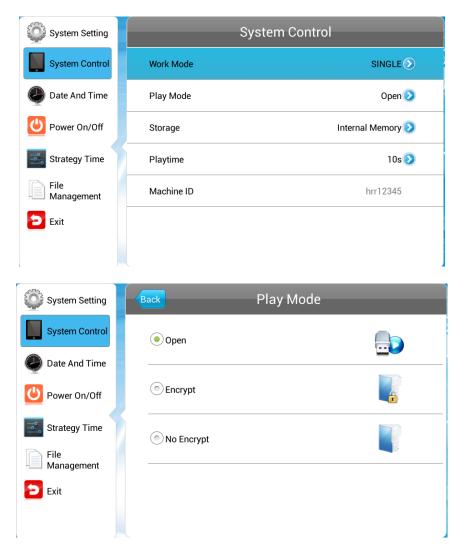

Content Storage

This feature allows you to display content directly from a USB stick should you want to. We recommend that you set this feature to "Internal Memory" however if you want your content to displays directly from your USB stick (and not copy over) please select "USB".

System Setting	Back Storage	
System Control	Internal Memory	
Date And Time		
Ower On/Off) SD Card	B
Strategy Time	() USB	
File Management		
Exit		

Image Duration

This feature allows you to set default duration time for your images (when not using the scheduling software).

System Setting	Playtime
System Control	(5s
Date And Time	 10s
Power On/Off	
Strategy Time	15s
File Management	(in) 30s
Exit	() 1min

1.6.3 Date & Time


To exit a sub-menu please press the "LEFT" navigation button the remote control, you can now navigate though the Main Menus sub-menus. To set accurate values first select the top "date" field by pressing "PLAY".

System Setting	Date And Time
System Control	2014/06/06 Friday
Date And Time	16:58
Power On/Off	Time zone GMT+08:00 义
Strategy Time	
File Management	
🔁 Exit	

Another window will now appear, allowing you to set your date values by using the navigation buttons on your remote control and the on screen "+" and "-" icons. Once you have finished navigate to and select "Save".

System Setting	Date And Time				
System Control	2014/06/04 Wednesday				
Network Setting	Set Date 19.02				
Date And Time	2013 5 3 2014 6 4				
Power On/Off	2015 7 5 GMT-11:00 >				
Strategy Time	Save Cancel				
File Management					
Exit					

Set the time using the same method, saving when complete.

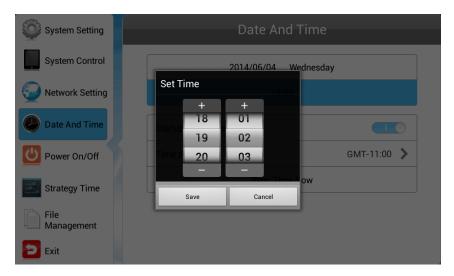

1.6.4 Power On/Off

Here is where you can set up your screens on/off timer, should you want it to power on and off automatically at designated times. If you do not wish to set on/off times for your screen please set the "Control Mode" to "Manual".

System Setting	Power On/Off			
System Control	Setting Mode Week Setting 📀			
🥹 Network Setting	Mon Tue Wed Thu Fri Sat Sun			
Date And Time	Control Mode Timer 📀			
Power On/Off	Timer			
	Always On			
Strategy Time	Always Off			
File	Manual			
Management				
🔁 Exit				

There are two "Setting Modes" – "Daily", allowing you to set the same on/off times for every day of the week or "Weekly", allowing you to set individual on/off times for each day of the week.

To activate the on/off timer set the "Control Mode" to "Timer". Next set the "Setting Mode" to either "Daily" or "Weekly". Finally using the navigation buttons on your remote control navigate t the timer fields, press "PLAY", and assign on and off times.

System Setting	Power On/Off			
System Control	Setting Mode Week Setting 📀			
Wetwork Setting	Mon Tue Wed Thu Fri Sat Sun			
Date And Time	Control Mode Timer 📀			
Power On/Off	1 Close 00:0000:00 🕥			
Churchana Time	2 Close 00:0000:00 📀			
Strategy Time	3 Close 00:0000:00 📀			
File Management	4 Close 00:0000:00 📀			
Exit	5 Close 00:0000:00 📀			

1.6.5 Timer Strategy

This feature allows you to schedule your screen to play at different volumes at different times of the day and switch to different AV inputs at different times of the day.

System Setting	Strategy Tim	e
System Control	Volume Time	۲
🥹 Network Setting	Port Time	٥
Date And Time		
Power On/Off		
Strategy Time		
File Management		
🔁 Exit		-

Volume Timer

To enable this feature turn the slider on (blue). New fields will now appear allowing you to set a default volume level as well as timer fields for setting different volume levels for different periods of the day.

System Setting	Back		Volume Time	
System Control	Timer			
Wetwork Setting	Def Vol		@	50/100
Date And Time	1	Close	00:0000:00	0/100 📀
Power On/Off	2	Close	00:0000:00	0/100 📀
Strategy Time	3	Close	00:0000:00	0/100 📀
File	4	Close	00:0000:00	0/100 📀
Management	5	Close	00:0000:00	0/100 📀
Exit				

Navigate to a timer field and press "PLAY" on your remote control. Activate the timer, set a volume level and also a start and end time. Finally navigate to and select "SAVE".

System Setting	Back	Set Volume Strate	gy
System Control	0	The first newled	
🥹 Network Setting	Open	The first period	
Date And Time	Start Time	00:00	
Power On/Off	End Time	00:00	
Strategy Time	Volume	Ø	0/100
File Management		Save	
Exit			

Port Timer

To enable this feature turn the slider on (blue). New fields will now appear allowing you to set different AV inputs for different periods of the day.


System Setting	Back Port Time				
System Control	Time				
😡 Network Setting					
Date And Time	1	Close	Digital Signage	00:0023:59	
Power On/Off	2	Close	Digital Signage	00:0023:59	\bigcirc
	3	Close	Digital Signage	00:0023:59	\bigcirc
Strategy Time	4	Close	Digital Signage	00:0023:59	\bigcirc
File Management	5	Close	Digital Signage	00:0023:59	\bigcirc
Exit					

Navigate to a timer field and press "PLAY" on your remote control. Activate the timer then set a start and end time and an AV input. Finally navigate to and select "SAVE".

System Setting	Ва	ck	Set Port Strateg	ĴУ
System Control				
🥹 Network Setting		Open	The first period	
Date And Time		Turn on	00:00	
Power On/Off	5 l	Turn off	23:59	
Strategy Time		Digital Signage		\bigcirc
File Management			Save	
Exit				

1.6.6 File Management

Here, you can check storage information such as memory capacity, used space and free space. You can also format the disk. You should be extremely careful here as **formatting the disk will result in a total loss of data.**

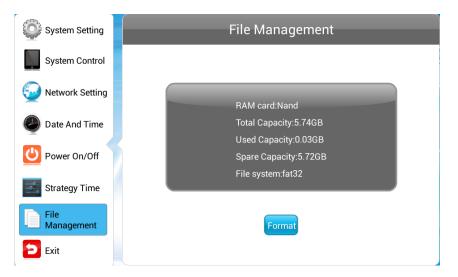


1.6.7 Exit

Highlighting and selecting this section will exit the Main Menu. If you have made any changes the system will ask to if you want to reboot the screen so that the changes can take effect, select "YES".

1.7 Display Settings

As well as having a main system menu that can be accessed through your home screen, the unit also has a display setting menu for changing which input source is being displays as well as altering values such as brightness, contrast and saturation. This can be accessed at any time by pressing the "MENU" button on your remote control.

Source

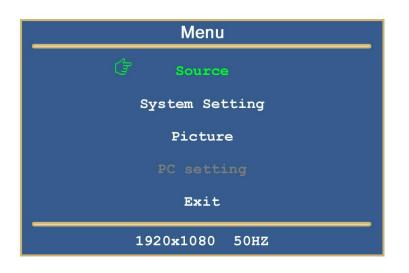

Here you can select which video signal the screen displays. As a default it is set to "Digital Signage" as this plays from the internal media player. You can also select HDMI and VGA, to do so navigate to your desired input source and press the "PLAY" button on your remote control. To go back to the previous menu navigate to Return and press "PLAY" on your remote control.

System Setting

Menu
Source
🕝 System Setting
Picture
PC setting
Exit
1920x1080 50HZ

Here you can set the OSD Language to either English or Chinese using the "LEFT" and "RIGHT" buttons on your remote control. We recommend that you do not change any of the other settings in this menu. To go back to the previous menu navigate to Return and press "PLAY" on your remote control.

Picture

Menu
Source
System Setting
👉 Picture
PC setting
Exit
1920x1080 50HZ

Here you can alter the overall image settings of your screen. The default value for all the image settings (apart from Sharpness) is 50. To adjust the Brightness, Contrast and Colour of your display navigate to the setting and use the left and right navigation buttons to adjust the value accordingly.

Note: it is recommended not to change the image settings of your screen unnecessarily.

Exit

Menu
Source
System Setting
Picture
PC setting
🕝 Exit
1920x1080 50HZ

To exit from this Display Settings menu, navigate to Exit and press "PLAY". If inactive for more than 10 seconds, you will automatically exit this menu.

2. System Operation

2.1 Supported Media Files

Media Type	Supported File Type
Image	JPG
Video	MPG, AVI, MP4
Audio	MP3

1. This unit does NOT support WMV or FLV video file types.

2. This unit does NOT support Sony ATRAC3, DTS or Dobly HD audio file types.

Note: Video and image files should be a maximum 1920x1080 resolution (16:9 aspect ratio).


2.2 Steps to Load Media Files

1. Copy the files you want to play on to USB drive in the root directory (without putting them into a folder).

- 2. Insert USB drive into the USB slot (see Figure 1).
- 3. This will automatically delete any files currently stored on the unit's internal memory.



4. The files will then be copied to the internal memory and once completely loaded it will ask you to remove USB drive.



5. Remove the USB drive.



6. The unit will now restart (if it doesn't please turn off and back on via the mains or press the reset button) and play the stored files in a loop.

3. Advanced Guide

Although this unit can operate without using any additional software, for more advanced applications please copy the Playlist Editor scheduling software (on the CD provided) to your computers' hard drive. The software also allows you to edit existing

3.1 Main Menu

On opening the application you will be greeted by the main menu screen, giving you the options of "Create New Playlist" and "Load Existing Playlist".



3.2 Creating Playlists

Once you have selected "Create New Playlist" the playlist creator will be launched.



The Playlist Editor is laid out in a user friendly way with the primary functions on the left hand side in easy to follow steps.

3.2.1 Add Schedule

The schedule functions as a timer for the playlists, so you can have between one and eight playlists scheduled to start and end at different times of the day, with up to 50 files in each playlist.

Note: If you enter more than one schedule ensure that the consecutive schedule times do not overlap.

Click on the "Add Schedule" Button

- > Type a Schedule name
- > Select preferred start time
- > Select preferred end time
- > Click "OK"
- > Schedule will appear in the playlist.

To add more schedules simply follow the whole process again for the preferred number of schedules, ensuring you select unique schedule names and times.



3.2.2 Add Selected Items

Note: For compatible file formats please refer to 2.2 Supported Media Files.


Adding Images

Note: Before adding image files please ensure that it has a file name of 11 characters or less and contain no special characters (!" \pm %^&* etc.) only .

Click the "Add Image" button > Select appropriate Schedule > Click "Browse" and locate and select files > Enter a duration time

- > Select Image switch mode
- > Click "OK"
- > Image appears in Schedule.

You can select multiple image files at once to add to a schedule, you can also move each item up or down in the playlist by using the arrow buttons on the right hand side.



Adding Audio

Note: Before adding audio files please ensure that it has a file name of 11 characters or less and contain no special characters (!"£\$%^&* etc.).

Click the "Add MP3" button

- > Select Schedule
- > Click "Browse" and select MP3 file
- > Enter volume level
- > Click "OK"
- > MP3 Appears in Schedule.

Note: You must add audio files after all image files.




Adding Video

Note: Before adding video files please ensure that it has a file name of 11 characters or less and contain no special characters (!"£\$%^&* etc.).

Click the "Add Video" button

- > Select Schedule
- > Click "Browse" and locate Video file
- > Enter preferred repeat
- > Enter preferred volume
- > Click "OK"
- > Video appears in playlist.



Note: You cannot add Videos and MP3 audio files in the same schedule.

Adding Scrolling Text

Note: you must ensure that the scrolling text function is activated on your display, you can do this by accessing the System Settings of the Main Menu (see 1.5.1 System Settings)

Click the "Add Scroll Message" button >Enter the message you would like to run across the bottom of the screen Or if you have a pre-existing .txt document containing your message: >Highlight the "Import from file" checkbox and click "Browse" >Locate .txt file and highlight >Click "OK" >Message appears at the bottom of the playlist.




3.2.3 Saving

Note: Before saving please ensure location drive is empty.

Click "Save to Disk"

> Click "Browse" and select the top level of the USB drive as the location of the playlist and files > Click "Save".



3.3 Editing Playlists

From the main menu click "Load Existing Playlist"

- > Locate and select playlist to edit
- > Playlist appears in playlist creator
- > Select item to edit and click "Edit" button located on the top right hand side of the application.

Note: You can also add items to the playlist and add further schedules.

3.3.1 Deleting Items

To delete items within a playlist, select the item and click "Delete" - located on the right hand side of the application. The item will be removed from the playlist.

4. F.A.Qs and Troubleshooting Guide

4.1 How do I play PowerPoint presentations on my display?

4.1.1 Option 1 (for plain slides with no animation):

You can save the PowerPoint presentation as a JPEG File Interchange Format (.JPG). Microsoft PowerPoint software allows the user to do this

1) Create or open a PowerPoint presentation.

2) Click File >Save As

3) Enter a File name

4) Click on "Save as type" scroll down and find the file extension "JPEG file interchange format", as shown in the image below.

Favorites				
	-1			
My Network	File <u>n</u> ame:	Digital Sign	-	Save
Places	Save as type:	Presentation	-	Cancel
		Design Template	· ·	
		PowerPoint Show		
		PowerPoint Add-In		
		GIF Graphics Interchange Format		
		JPEG File Interchange Format		
		PNG Portable Network Graphics Format	•	

5) Click Save.

6) A message will appear asking if you would like to save all slides as JPEG's

7) Once you have selected your option, The JPEG images will be saved and are ready to use within a playlist or to upload to a storage device.

Note: For the best portrait resolution, you can use this PowerPoint Page Setup: Width 42.6cm; Height 24cm (16:9 Ratio)

4.1.2 Options 2 (for presentations with animation):

You can convert the PowerPoint presentation to a MPEG video clip. For the best display quality you should use the MPEG2 format which gives the best display quality. We suggest that you use the following software:

Software Name: Wondershare PPT2DVD

Web link: <u>http://www.ppt-to-dvd.com/ppt2dvd/overview.html</u> :

Select Video Format: PowerPoint to MPEG2 Video Settings:

• TV Standard: NTSC (29.97fbs);

Standard: Standard DVD;

- Aspect Ratio: 16:9 (widescreen);
- Encode Size: Width 720, Height 480.

4.2 Video Format Conversion

There are two possible tools for converting video

4.2.1 Format Factory

This is a free multipurpose convertor that can be used for normal definition

Standard Definition

1. Download a free convertor (Windows) called Format Factory which can be found at http://www.formatoz.com/

2. Start the Software (picture 1).



- 3. On the left hand window pane select the 'Video' conversion options.
- 4. Select the 'All to AVI' conversion
- 5. Click the 'Add File' button and locate the file to be converted.

17		FormatFactory 2.60	_ = X
Task S	Skin La 🐼	All to MPG	x
0)pen	2×	ок
	Look in:	🗁 19J1,32H1, 40H1,46 🛛 🔮 🗊 🖾 •	
	Network Magic Folders My Recent Documents Desktop My Documents	@]17.mpg	Add File
		File name:	
» L	My Computer	Files of type: All Supported Video Files Cancel Dend setting name (DVD NTSC Large)	Add Folder
2	ROM D	Output Folder C:\Documents and Settings\Kevin Sun\My Documents\FFO	utp 🗸 Browse
💽 C:\Do	ocuments and Sett	ngs\Kevin Sun\My Documents\FFOutput Elapsed Time : 00:00:00 C After	Converting : Shut Down Computer .::

6. Click the 'Output Setting' button and modify it to look like the image shown below. A number of important settings have been highlighted.

7. Select 'OK' to save these changes and then Press 'OK' button to goto main screen

Xide Vide	o Setting
Profile HD 1280x720 XVID Wide Screen	Save As OK
Setting	Value
Use system decoder (AviSynth)	On 🔥
🖃 Video Stream	
Video Encode	MPEG4(Xvid)
Video Size	<1280x720
Bitrate (KB/s)	2400
FPS	25
Aspect Ratio	Automatic
Encode 2 pass	No
🖃 Audio Stream	3
Audio Encode	MP3
Sample Rate (HZ)	48000
Bitrate (KB/s)	192
Audio Channel	2
Disable Audio	No
Volume Control (+dB)	0 dB
Audio Stream Index	Default
Additional Subtitle	
🗉 Watermark (AviSynth)	
Advanced	
Rotate	No
× Mirror	No 💌

8. Press the 'Start' button along the top to start the conversion. Once completed, press the 'Output

Folder' to see the converted video.

2			Forr	matFactory 2.6	0	- 7
	kin Language Help		~		\sim	
Re	move 🗙 Clear List		Stop Start	🧕 Option 🌔	Output Folder	HomePage
	Video		Can Ca	mera,	Form	a t Mobile
	All to RMVB		67	0	Facto	ory
	GIF		Source	Size	Convert State	Output [F2]
	All to GIF		📕 17.mpg	24.76M	All to MPG	C:\Documents and Settings\Kevin
	All to WMV					
	All to MKV					
	All to MPG					
	All to VOB					
	Audio	0				
3	AUUIO					
2	Picture					
		50				

4.2.2 HD Video Converter Deluxe

This is only really useful for High Definition videos. Download link: <u>http://www.winxdvd.com/hd-video-converter-deluxe/</u>

This software is not free.

MP4 gives the best display quality. Please follow the following steps:

- 1. Select "to HD MP4" tab.
- 2. Change audio quality to 448 kbps, and change video quality to 12000, output image setting to custom size with custom aspect ratio, and video resolution to HD1080P(1920:1080), video codec to MPEG4.

See the screen shot below for the recommend settings.

Add File	Add URL Remove	Clear Option		Check new version	
		and the second division of the	and a		na
	Constant Street of	Carlo and the second	States and states of the	world Cu	P <07
per-	Getting	started		A	
(Bank)	1.01-1//	<i>"</i> b a b a b a b a b a b a b a b a b a b a b a b b a b a b a b a b a b a b a b a b a b a b a b a b a 	Source videou		
VOIN !!			source video:		
No.	2.Click" to XXX	table to choose	an output form	at:	
A	3.Click"	" button to start c	onversion.		
<u>La</u>	Ore Olick Video	Conversion Solution	for Windows		-
Courte Land	Une-Click Video	conversion solution	I IUF WINUUWS		
					\sim
to General		to HD Video to Apple		Microsoft to Portable	to Music
C to HD AV	to HD MP4	to HD MPEG 0 to H	D TS 0 to HD	WMV 0 to HD MOV	C to HD Youtub
— Audio Settino.					
	448 🔻 Kbps Audio Sampl	e Rate : 44100 🔻 Volum	ne:+	4 db. Format : aac 💌	
— Video Setting					4
	12000 🕞 Kbps Video Frame		ut Format : MP4	Video Codec MPEG4 -	\mathcal{P}
Output Image Set		MAspect Ratio	Resolution (W : H)	1080P (1920:1080)	
CPU Core Use :		rlacing 📃 Use High Quality	/ Engine 📃 Ford	e A/V Sync Effect	Start
CFU CUIE USE ,]					

4.3 Connecting screen to PC

If your PC has a HDMI output then this is ideal. Simply connect one end of a HDMI cable to the screens HDMI input (see Figure 4) and the other to your PCs HDMI output port. Using this method will carry both your PCs visual and audio signals. If your PC does not have a HDMI output, connect it to the screen using a VGA cable instead, this carries the video signal. If you wish the audio signal from your PC to be sent to the screen as well, this can be achieved by using a male-to-male 3.5mm audio jack cable. To change the input source of your screen press the SOURCE button located on the top right hand corner of your remote control. Next, navigate to your desired source and press "PLAY" on your remote control.

4.4 My media file does not fit properly on the screen

If your media is being displayed with black edges please refer to section 2.11. This has happened because the file does not have a 16:9 aspect ratio (1920x1080). Please resize file to 1920x1080 pixels and try loading the media onto the display once again.

4.5 My media file will not display or is missing from the playlist

In this situation the first step to take is to start with a blank USB drive. Copy one supported picture file (2.1 Supported Media Files) onto the blank USB drive and insert this into the unit. If this works there are most likely one or more unsupported files or folders on your original playlist.

If this does not work please check first that the media file is the correct size to fit the screen -1920x1080 pixels. If it is any bigger than this it is likely the media file will not display.

Finally make absolutely sure that your media is a supported file type as the screen will not recognise unsupported file types.

4.6 My media files will not update

If you are have problems updating your display follow these steps to ensure it is not a technical issue.

- 1) Ensure that there are no additional unsupported files or folders stored on the USB drive.
- 2) Make sure the USB drive is firmly inserted into USB slot
- 3) Before contacting your supplier try another USB drive to be certain this is not the fault.

4.7 My moving GIF files will not move.

As the screen recognises any .gif file as an image it will display the first frame of a moving gif for the allocated image display time.